

ECONOMY, SCREW TOGETHER HOODS, SHORT SCREWS

CCOV-SC-MP SERIES

TECHNICAL SPECIFICATIONS




Material:	UL Recognised Plastic Material
Plating:	Nickel over Copper
Operating Temperature:	-40°C to +120°C
Cable Entry:	Top Entry
Thumbscrews:	UNC 4-40
Cable Diameter:	Up to 13mm

FEATURES

- Available in sizes 9-15-25-37-50
- Re-openable
- Also available in Unshielded version

Size	Product Code
9-way	CCOV9-SC-MP
15-way	CCOV15-SC-MP
25-way	CCOV25-SC-MP
37-way	CCOV37-SC-MP
50-way	CCOV50-SC-MP

Size	Dim A	Dim B	Dim C
9-way	31,0	16,0	40,2
15-way	39,6	17,4	38,0
25-way	55,0	16,5	44,5
37-way	69,0	24,0	52,5
50-way	69,5	19,5	44,5

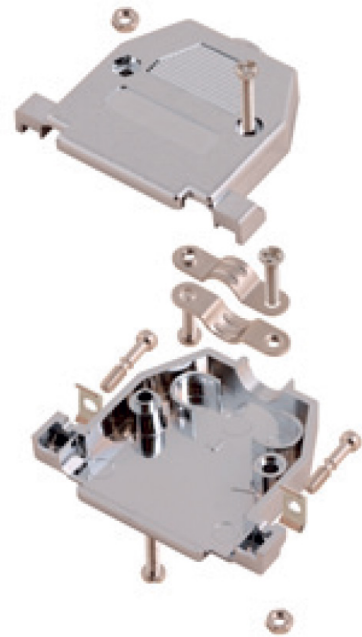

ECONOMY, SCREW TOGETHER HOODS, LONG SCREWS


CCOV-SCL-MP SERIES

TECHNICAL SPECIFICATIONS

Material:	UL Recognised Plastic Material
Plating:	Nickel over Copper
Operating Temperature:	-40°C to +120°C
Cable Entry:	Top Entry
Thumbscrews:	UNC 4-40
Cable Diameter:	Up to 13 mm

FEATURES

- Available in sizes 9-15-25-37-50
- Re-openable
- Also available in Unshielded version

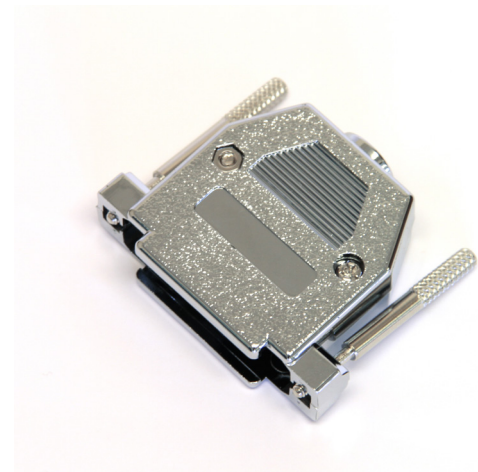

Size	Product Code
9-way	CCOV9-SCL-MP
15-way	CCOV15-SCL-MP
25-way	CCOV25-SCL-MP
37-way	CCOV37-SCL-MP
50-way	CCOV50-SCL-MP

Size	Dim A	Dim B	Dim C
9-way	31,0	16,0	40,2
15-way	39,6	17,4	38,0
25-way	55,0	16,5	44,5
37-way	69,0	24,0	52,5
50-way	69,5	19,5	44,5

