

### IP67 CIRCULAR THREADED CONNECTORS, PLASTIC




Specification		
Number of Contact	3+PE	6+PE
Termination	Screw	Solder
Wire size	Max 2.5mm <sup>2</sup> /AWG14	Max 0.75mm <sup>2</sup> /AWG18
Rated voltage (V)	400V	250V
Rated current (A)	16A	10A
Shell material	Nylon66, fire resistance: V-0	Nylon66, fire resistance: V-0
Contact material	Brass with gold plating	Brass with gold plating
Cable outlet diameter	6, 8, 10mm	6, 8, 10mm
IP rating	IP67	IP67




#### WA22J4TE2

WA 22 male cable connector  
3+PE, screw termination

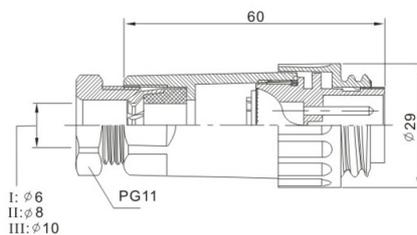


#### WA22J7TE1

WA 22 male cable connector  
6+PE, solder termination

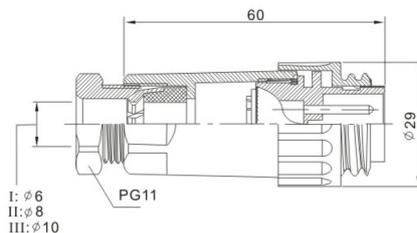


#### WA22K4Z2

WA 22 female panel connector  
3+PE, screw termination

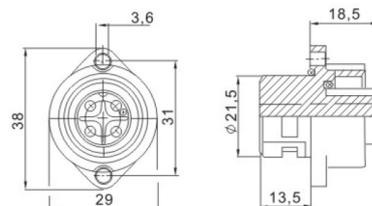

#### WA22K7Z1

WA 22 female panel connector  
6+PE, solder termination

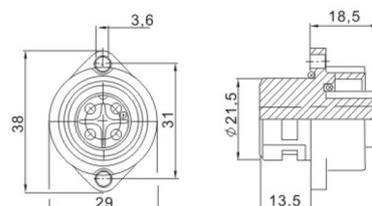


### IP67 CIRCULAR THREADED CONNECTORS, PLASTIC




**WA22K4ZE2**

WA 22 female cable connector  
3+PE, screw termination

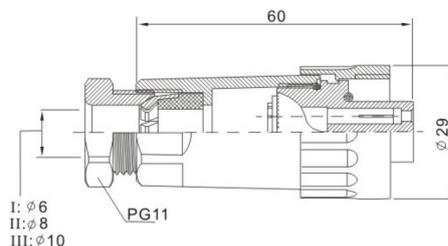


**WA22K7ZE1**

WA 22 female cable connector  
6+PE, solder termination

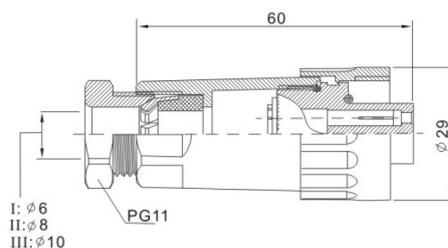


**WA22J4Z2**

WA 22 male panel connector  
3+PE, screw termination

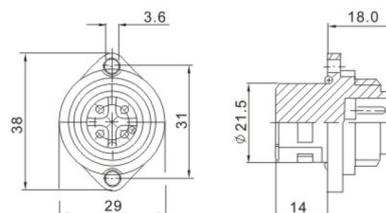


**WA22J7Z1**

WA 22 male panel connector  
6+PE, solder termination

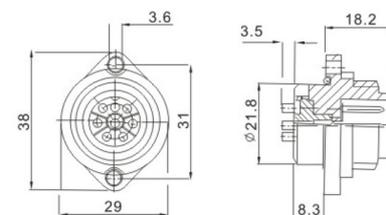

**WA22G1**

Cap



**WA22G2**

Cap

