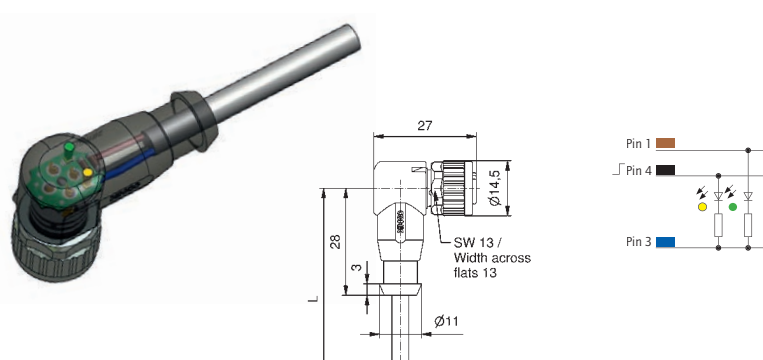
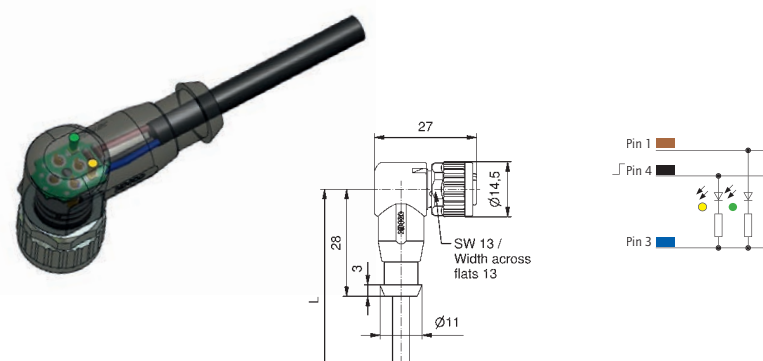
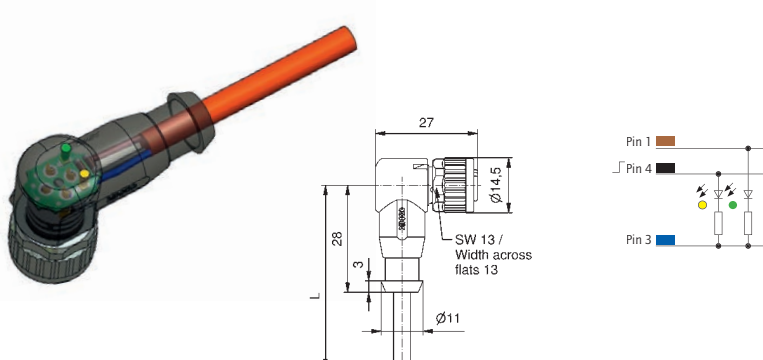


Female connector angled with 2-LED

		Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm ²]	Description	Part No.
PVC, grey, LiYY 	Contact assignment	3	A	30	4	2	0,34	SAL-12-RKW3-2L-2 / A1	43-10368
						3		SAL-12-RKW3-2L-3 / A1	43-10369
						5		SAL-12-RKW3-2L-5 / A1	43-10370
						10		SAL-12-RKW3-2L-10 / A1	43-10371
TPU, UL, halogenfree, black, Li9Y11Y 	Contact assignment	3	A	30	4	2	0,34	SAL-12-RKW3-2L-2 / K1	43-10868
						3		SAL-12-RKW3-2L-3 / K1	43-10869
						5		SAL-12-RKW3-2L-5 / K1	43-10870
						10		SAL-12-RKW3-2L-10 / K1	43-10871
TPU, UL, irradiated, orange Li12Y11X 	Contact assignment	3	A	30	4	2	0,34	SAL-12-RKW3-2L-2 / J1	43-10872
						3		SAL-12-RKW3-2L-3 / J1	43-10873
						5		SAL-12-RKW3-2L-5 / J1	43-10874
						10		SAL-12-RKW3-2L-10 / J1	43-10875