


Male connector axial

PVC, grey, LiYY

Contact assignment

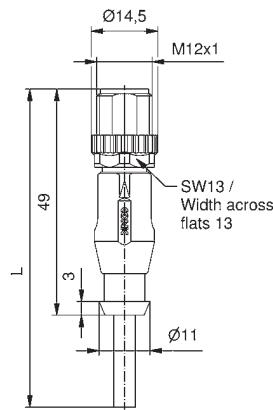

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5
Pin 6
Pin 7

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5
Pin 6
Pin 7
Pin 8


Pin 1
Pin 2
Pin 3
Pin 4
Pin 5
Pin 6
Pin 7
Pin 8
Pin 9
Pin 10
Pin 11
Pin 12

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3	A	250	4	2	0,34	SAL-12-RS3-2 / A1	43-10084
				3		SAL-12-RS3-3 / A1	43-10085
				5		SAL-12-RS3-5 / A1	43-10086
				10		SAL-12-RS3-10 / A1	43-10087
4	A	250	4	2	0,34	SAL-12-RS4-2 / A1	43-10104
				3		SAL-12-RS4-3 / A1	43-10105
				5		SAL-12-RS4-5 / A1	43-10106
				10		SAL-12-RS4-10 / A1	43-10107
5	A	60	4	2	0,34	SAL-12-RS5-2 / A1	43-10124
				3		SAL-12-RS5-3 / A1	43-10125
				5		SAL-12-RS5-5 / A1	43-10126
				10		SAL-12-RS5-10 / A1	43-10127
6	A	30	2	2	0,25	SAL-12-RS6-2 / A1	43-10144
				3		SAL-12-RS6-3 / A1	43-10145
				5		SAL-12-RS6-5 / A1	43-10146
				10		SAL-12-RS6-10 / A1	43-10147
8	A	30	2	2	0,25	SAL-12-RS8-2 / A1	43-10156
				3		SAL-12-RS8-3 / A1	43-10157
				5		SAL-12-RS8-5 / A1	43-10158
				10		SAL-12-RS8-10 / A1	43-10159
12	A	30	1,5	2	0,14	SAL-12-RS12-2 / A3	43-11272
				3		SAL-12-RS12-3 / A3	43-11273
				5		SAL-12-RS12-5 / A3	43-11274
				10		SAL-12-RS12-10 / A3	43-11275

Male connector axial

TPU, UL, halogenfree, black, Li9Y11Y

Contact assignment

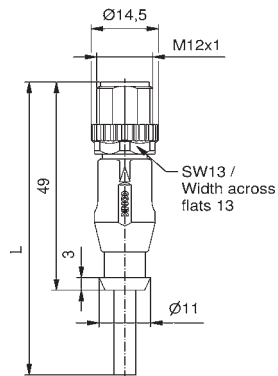

Pin 1
Pin 3
Pin 4

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]
3	A	250	4	2	0,34
				3	
				5	
				10	
4	A	250	4	2	0,34
				3	
				5	
				10	
5	A	60	4	2	0,34
				3	
				5	
				10	
6	A	30	2	2	0,25
				3	
				5	
				10	
8	A	30	2	2	0,25
				3	
				5	
				10	
12	A	30	1,5	2	0,14
				3	
				5	
				10	

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3

Pin 4
Pin 6
Pin 7

Pin 1
Pin 2
Pin 3
Pin 4



Pin 5
Pin 6
Pin 7
Pin 8

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5
Pin 6

Pin 7
Pin 8
Pin 9
Pin 10
Pin 11
Pin 12

Description	Part No.
SAL-12-RS3-2 / K1	43-10096
SAL-12-RS3-3 / K1	43-10097
SAL-12-RS3-5 / K1	43-10098
SAL-12-RS3-10 / K1	43-10099
SAL-12-RS4-2 / K1	43-10116
SAL-12-RS4-3 / K1	43-10117
SAL-12-RS4-5 / K1	43-10118
SAL-12-RS4-10 / K1	43-10119
SAL-12-RS5-2 / K1	43-10136
SAL-12-RS5-3 / K1	43-10137
SAL-12-RS5-5 / K1	43-10138
SAL-12-RS5-10 / K1	43-10139
SAL-12-RS6-2 / K1	43-11058
SAL-12-RS6-3 / K1	43-11059
SAL-12-RS6-5 / K1	43-11060
SAL-12-RS6-10 / K1	43-11061
SAL-12-RS8-2 / K1	43-11062
SAL-12-RS8-3 / K1	43-11063
SAL-12-RS8-5 / K1	43-11064
SAL-12-RS8-10 / K1	43-11065
SAL-12-RS12-2 / K1	43-11276
SAL-12-RS12-3 / K1	43-11277
SAL-12-RS12-5 / K1	43-11278
SAL-12-RS12-10 / K1	43-11279

TPU, UL, irradiated, orange Li12Y11X

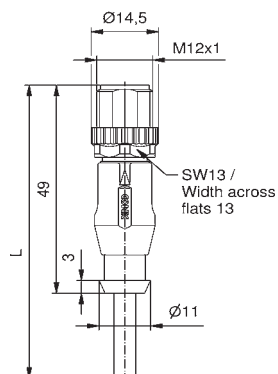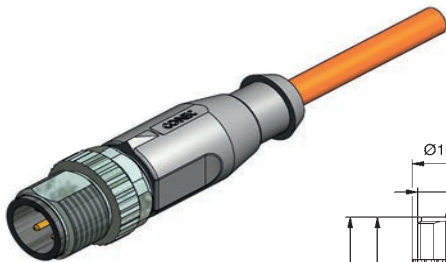

Pin 1
Pin 3
Pin 4

3	A	250	4	2	0,34
				3	
				5	
				10	
4	A	250	4	2	0,34
				3	
				5	
				10	
5	A	60	4	2	0,34
				3	
				5	
				10	

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

SAL-12-RS3-2 / J1	43-10100
SAL-12-RS3-3 / J1	43-10101
SAL-12-RS3-5 / J1	43-10102
SAL-12-RS3-10 / J1	43-10103
SAL-12-RS4-2 / J1	43-10120
SAL-12-RS4-3 / J1	43-10121
SAL-12-RS4-5 / J1	43-10122
SAL-12-RS4-10 / J1	43-10123
SAL-12-RS5-2 / J1	43-10140
SAL-12-RS5-3 / J1	43-10141
SAL-12-RS5-5 / J1	43-10142
SAL-12-RS5-10 / J1	43-10143