



Male connector angled

PVC, grey, LiYY

Contact assignment

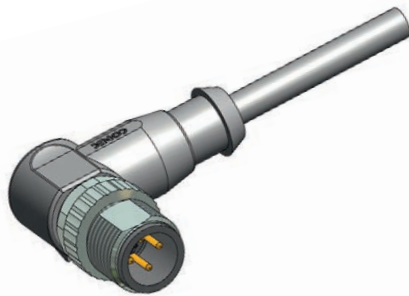

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3

Pin 4
Pin 6
Pin 7

Pin 1
Pin 2
Pin 3
Pin 4


Pin 5
Pin 6
Pin 7
Pin 8

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3	A	250	4	2	0,34	SAL-12-RSW3-2 / A1 / A1090	43-14424
				3		SAL-12-RSW3-3 / A1 / A1090	43-14425
				5		SAL-12-RSW3-5 / A1 / A1090	43-14426
				10		SAL-12-RSW3-10 / A1 / A1090	43-14427
4	A	250	4	2	0,34	SAL-12-RSW4-2 / A1 / A1090	43-14436
				3		SAL-12-RSW4-3 / A1 / A1090	43-14437
				5		SAL-12-RSW4-5 / A1 / A1090	43-14438
				10		SAL-12-RSW4-10 / A1 / A1090	43-14439
5	A	60	4	2	0,34	SAL-12-RSW5-2 / A1 / A1090	43-14448
				3		SAL-12-RSW5-3 / A1 / A1090	43-14449
				5		SAL-12-RSW5-5 / A1 / A1090	43-14450
				10		SAL-12-RSW5-10 / A1 / A1090	43-14451
6	A	30	2	2	0,25	SAL-12-RSW6-2 / A1 / A1090	43-14460
				3		SAL-12-RSW6-3 / A1 / A1090	43-14461
				5		SAL-12-RSW6-5 / A1 / A1090	43-14462
				10		SAL-12-RSW6-10 / A1 / A1090	43-14463
8	A	30	2	2	0,25	SAL-12-RSW8-2 / A1 / A1090	43-14468
				3		SAL-12-RSW8-3 / A1 / A1090	43-14469
				5		SAL-12-RSW8-5 / A1 / A1090	43-14470
				10		SAL-12-RSW8-10 / A1 / A1090	43-14471

Male connector angled

TPU, UL, halogenfree, black, Li9Y11Y

Contact assignment



Pin 1
Pin 3
Pin 4

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]
3	A	250	4	2	0,34
				3	
				5	
				10	
4	A	250	4	2	0,34
				3	
				5	
				10	
5	A	60	4	2	0,34
				3	
				5	
				10	
6	A	30	2	2	0,25
				3	
				5	
				10	
8	A	30	2	2	0,25
				3	
				5	
				10	

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3



Pin 4
Pin 6
Pin 7

Pin 1
Pin 2
Pin 3
Pin 4

Pin 5
Pin 6
Pin 7
Pin 8

Description	Part No.
SAL-12-RSW3-2 / K1 / A1090	43-14428
SAL-12-RSW3-3 / K1 / A1090	43-14429
SAL-12-RSW3-5 / K1 / A1090	43-14430
SAL-12-RSW3-10 / K1 / A1090	43-14431
SAL-12-RSW4-2 / K1 / A1090	43-14440
SAL-12-RSW4-3 / K1 / A1090	43-14441
SAL-12-RSW4-5 / K1 / A1090	43-14442
SAL-12-RSW4-10 / K1 / A1090	43-14443
SAL-12-RSW5-2 / K1 / A1090	43-14452
SAL-12-RSW5-3 / K1 / A1090	43-14453
SAL-12-RSW5-5 / K1 / A1090	43-14454
SAL-12-RSW5-10 / K1 / A1090	43-14455
SAL-12-RSW6-2 / K1 / A1090	43-14464
SAL-12-RSW6-3 / K1 / A1090	43-14465
SAL-12-RSW6-5 / K1 / A1090	43-14466
SAL-12-RSW6-10 / K1 / A1090	43-14467
SAL-12-RSW8-2 / K1 / A1090	43-14472
SAL-12-RSW8-3 / K1 / A1090	43-14473
SAL-12-RSW8-5 / K1 / A1090	43-14474
SAL-12-RSW8-10 / K1 / A1090	43-14475

TPU, UL, irradiated, orange, Li12Y11X

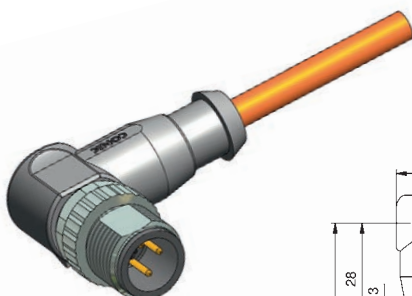

Pin 1
Pin 3
Pin 4

3	A	250	4	2	0,34	SAL-12-RSW3-2 / J1 / A1090	43-14432
				3		SAL-12-RSW3-3 / J1 / A1090	43-14433
				5		SAL-12-RSW3-5 / J1 / A1090	43-14434
				10		SAL-12-RSW3-10 / J1 / A1090	43-14435
4	A	250	4	2	0,34	SAL-12-RSW4-2 / J1 / A1090	43-14444
				3		SAL-12-RSW4-3 / J1 / A1090	43-14445
				5		SAL-12-RSW4-5 / J1 / A1090	43-14446
				10		SAL-12-RSW4-10 / J1 / A1090	43-14447
5	A	60	4	2	0,34	SAL-12-RSW5-2 / J1 / A1090	43-14456
				3		SAL-12-RSW5-3 / J1 / A1090	43-14457
				5		SAL-12-RSW5-5 / J1 / A1090	43-14458
				10		SAL-12-RSW5-10 / J1 / A1090	43-14459

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5