


Female connector axial
Male connector angled

PVC, grey, LiYY

Contact assignment

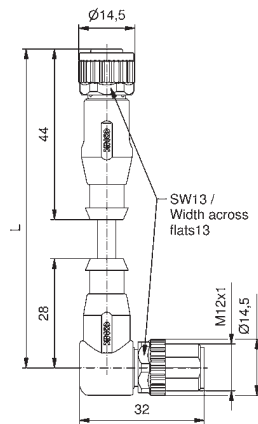

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3

Pin 4

Pin 5

Pin 6


Pin 7

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3	A	250	4	0,3	0,34	SAL-12-RK3-RSW3-0,3/A1/A1090	43-14593
				0,6		SAL-12-RK3-RSW3-0,6/A1/A1090	43-14594
				1,5		SAL-12-RK3-RSW3-1,5/A1/A1090	43-14595
				3		SAL-12-RK3-RSW3-3/A1/A1090	43-14596
4	A	250	4	0,3	0,34	SAL-12-RK4-RSW4-0,3/A1/A1090	43-14605
				0,6		SAL-12-RK4-RSW4-0,6/A1/A1090	43-14606
				1,5		SAL-12-RK4-RSW4-1,5/A1/A1090	43-14607
				3		SAL-12-RK4-RSW4-3/A1/A1090	43-14608
5	A	60	4	0,3	0,34	SAL-12-RK5-RSW5-0,3/A1/A1090	43-14617
				0,6		SAL-12-RK5-RSW5-0,6/A1/A1090	43-14618
				1,5		SAL-12-RK5-RSW5-1,5/A1/A1090	43-14619
				3		SAL-12-RK5-RSW5-3/A1/A1090	43-14620
6	A	30	2	0,3	0,25	SAL-12-RK6-RSW6-0,3/A1/A1090	43-14629
				0,6		SAL-12-RK6-RSW6-0,6/A1/A1090	43-14630
				1,5		SAL-12-RK6-RSW6-1,5/A1/A1090	43-14631
				3		SAL-12-RK6-RSW6-3/A1/A1090	43-14632
8	A	30	2	0,3	0,25	SAL-12-RK8-RSW8-0,3/A1/A1090	43-14637
				0,6		SAL-12-RK8-RSW8-0,6/A1/A1090	43-14638
				1,5		SAL-12-RK8-RSW8-1,5/A1/A1090	43-14639
				3		SAL-12-RK8-RSW8-3/A1/A1090	43-14640

Female connector axial
Male connector angled

TPU, UL, halogenfree, black, Li9Y11Y

Contact assignment

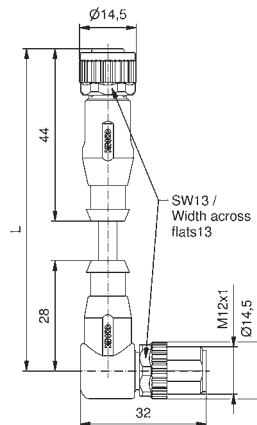

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3



Pin 4
Pin 6
Pin 7

Pin 1
Pin 2
Pin 3
Pin 4

Pin 5
Pin 6
Pin 7
Pin 8

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3	A	250	4	0,3	0,34	SAL-12-RK3-RSW3-0,3 / K1 / A1090	43-14597
				0,6		SAL-12-RK3-RSW3-0,6 / K1 / A1090	43-14598
				1,5		SAL-12-RK3-RSW3-1,5 / K1 / A1090	43-14599
				3		SAL-12-RK3-RSW3-3 / K1 / A1090	43-14600
4	A	250	4	0,3	0,34	SAL-12-RK4-RSW4-0,3 / K1 / A1090	43-14609
				0,6		SAL-12-RK4-RSW4-0,6 / K1 / A1090	43-14610
				1,5		SAL-12-RK4-RSW4-1,5 / K1 / A1090	43-14611
				3		SAL-12-RK4-RSW4-3 / K1 / A1090	43-14612
5	A	60	4	0,3	0,34	SAL-12-RK5-RSW5-0,3 / K1 / A1090	43-14621
				0,6		SAL-12-RK5-RSW5-0,6 / K1 / A1090	43-14622
				1,5		SAL-12-RK5-RSW5-1,5 / K1 / A1090	43-14623
				3		SAL-12-RK5-RSW5-3 / K1 / A1090	43-14624
6	A	30	2	0,3	0,25	SAL-12-RK6-RSW6-0,3 / K1 / A1090	43-14633
				0,6		SAL-12-RK6-RSW6-0,6 / K1 / A1090	43-14634
				1,5		SAL-12-RK6-RSW6-1,5 / K1 / A1090	43-14635
				3		SAL-12-RK6-RSW6-3 / K1 / A1090	43-14636
8	A	30	2	0,3	0,25	SAL-12-RK8-RSW8-0,3 / K1 / A1090	43-14641
				0,6		SAL-12-RK8-RSW8-0,6 / K1 / A1090	43-14642
				1,5		SAL-12-RK8-RSW8-1,5 / K1 / A1090	43-14643
				3		SAL-12-RK8-RSW8-3 / K1 / A1090	43-14644

TPU, UL, irradiated, orange, Li12Y11X

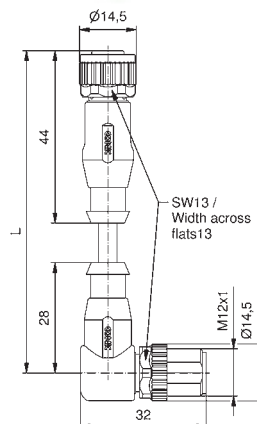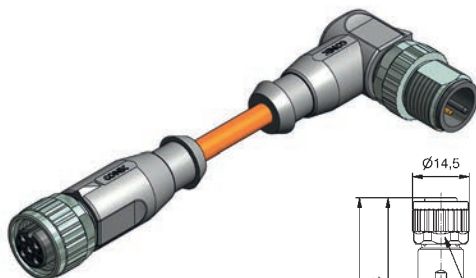

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

3	A	250	4	0,3	0,34	SAL-12-RK3-RSW3-0,3 / J1 / A1090	43-14601
				0,6		SAL-12-RK3-RSW3-0,6 / J1 / A1090	43-14602
				1,5		SAL-12-RK3-RSW3-1,5 / J1 / A1090	43-14603
				3		SAL-12-RK3-RSW3-3 / J1 / A1090	43-14604
4	A	250	4	0,3	0,34	SAL-12-RK4-RSW4-0,3 / J1 / A1090	43-14613
				0,6		SAL-12-RK4-RSW4-0,6 / J1 / A1090	43-14614
				1,5		SAL-12-RK4-RSW4-1,5 / J1 / A1090	43-14615
				3		SAL-12-RK4-RSW4-3 / J1 / A1090	43-14616
5	A	60	4	0,3	0,34	SAL-12-RK5-RSW5-0,3 / J1 / A1090	43-14625
				0,6		SAL-12-RK5-RSW5-0,6 / J1 / A1090	43-14626
				1,5		SAL-12-RK5-RSW5-1,5 / J1 / A1090	43-14627
				3		SAL-12-RK5-RSW5-3 / J1 / A1090	43-14628