
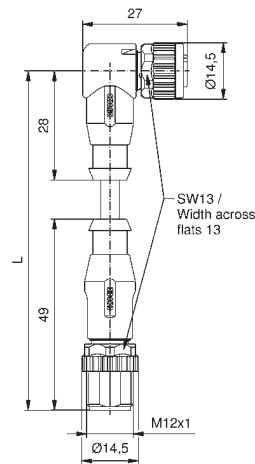


Female connector angled  
Male connector axial

PVC, grey, LiYY

Contact assignment

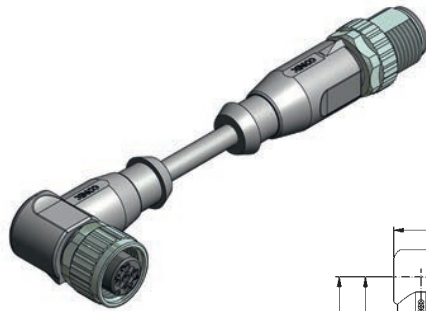

Pin 1  
Pin 3  
Pin 4

Pin 1  
Pin 2  
Pin 3  
Pin 4

Pin 1  
Pin 2  
Pin 3  
Pin 4  
Pin 5

Pin 1  
Pin 2  
Pin 3

Pin 4  
Pin 6  
Pin 7

Pin 1  
Pin 2  
Pin 3  
Pin 4

Pin 5  
Pin 6  
Pin 7  
Pin 8


| Number of poles | Coding | Rated voltage [V] | Current rating [A] | Cable length = L [m] | Wire cross section [mm²] | Description            | Part No. |
|-----------------|--------|-------------------|--------------------|----------------------|--------------------------|------------------------|----------|
| 3               | A      | 250               | 4                  | 0,3                  | 0,34                     | SAL-12-RKW3-RS3-0,3/A1 | 43-10688 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW3-RS3-0,6/A1 | 43-10689 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW3-RS3-1,5/A1 | 43-10690 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW3-RS3-3/A1   | 43-10691 |
| 4               | A      | 250               | 4                  | 0,3                  | 0,34                     | SAL-12-RKW4-RS4-0,3/A1 | 43-10708 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW4-RS4-0,6/A1 | 43-10709 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW4-RS4-1,5/A1 | 43-10710 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW4-RS4-3/A1   | 43-10711 |
| 5               | A      | 60                | 4                  | 0,3                  | 0,34                     | SAL-12-RKW5-RS5-0,3/A1 | 43-10952 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW5-RS5-0,6/A1 | 43-10953 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW5-RS5-1,5/A1 | 43-10954 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW5-RS5-3/A1   | 43-10955 |
| 6               | A      | 30                | 2                  | 0,3                  | 0,25                     | SAL-12-RKW6-RS6-0,3/A1 | 43-11082 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW6-RS6-0,6/A1 | 43-11083 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW6-RS6-1,5/A1 | 43-11084 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW6-RS6-3/A1   | 43-11085 |
| 8               | A      | 30                | 2                  | 0,3                  | 0,25                     | SAL-12-RKW8-RS8-0,3/A1 | 43-10728 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW8-RS8-0,6/A1 | 43-10729 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW8-RS8-1,5/A1 | 43-10730 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW8-RS8-3/A1   | 43-10731 |

Female connector angled

Male connector axial

TPU, UL, halogenfree, black, Li9Y11Y

Contact assignment

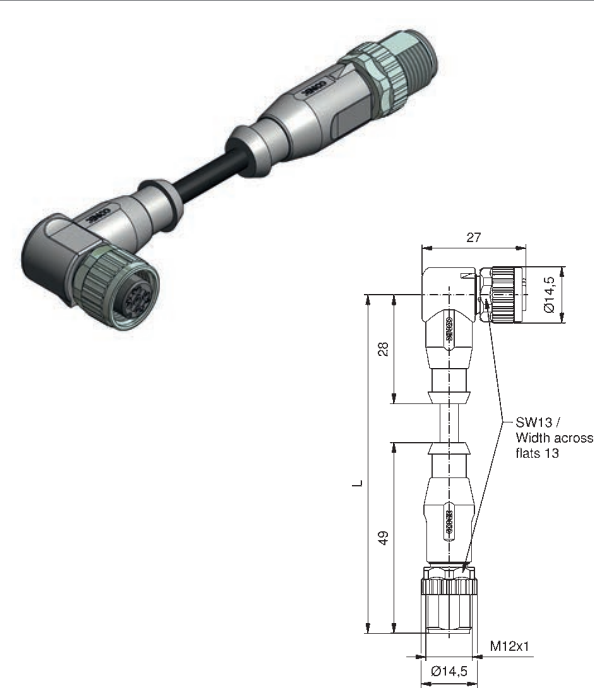

Pin 1  
Pin 3  
Pin 4

Pin 1  
Pin 2  
Pin 3  
Pin 4

Pin 1  
Pin 2  
Pin 3  
Pin 4  
Pin 5

Pin 1  
Pin 2  
Pin 3


Pin 4  
Pin 6  
Pin 7

Pin 1  
Pin 2  
Pin 3  
Pin 4

Pin 5  
Pin 6  
Pin 7  
Pin 8

| Number of poles | Coding | Rated voltage [V] | Current rating [A] | Cable length = L [m] | Wire cross section [mm²] | Description              | Part No. |
|-----------------|--------|-------------------|--------------------|----------------------|--------------------------|--------------------------|----------|
| 3               | A      | 250               | 4                  | 0,3                  | 0,34                     | SAL-12-RKW3-RS3-0,3 / K1 | 43-10700 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW3-RS3-0,6 / K1 | 43-10701 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW3-RS3-1,5 / K1 | 43-10702 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW3-RS3-3 / K1   | 43-10703 |
| 4               | A      | 250               | 4                  | 0,3                  | 0,34                     | SAL-12-RKW4-RS4-0,3 / K1 | 43-10720 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW4-RS4-0,6 / K1 | 43-10721 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW4-RS4-1,5 / K1 | 43-10722 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW4-RS4-3 / K1   | 43-10723 |
| 5               | A      | 60                | 4                  | 0,3                  | 0,34                     | SAL-12-RKW5-RS5-0,3 / K1 | 43-10964 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW5-RS5-0,6 / K1 | 43-10965 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW5-RS5-1,5 / K1 | 43-10966 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW5-RS5-3 / K1   | 43-10967 |
| 6               | A      | 30                | 2                  | 0,3                  | 0,25                     | SAL-12-RKW6-RS6-0,3 / K1 | 43-11086 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW6-RS6-0,6 / K1 | 43-11087 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW6-RS6-1,5 / K1 | 43-11088 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW6-RS6-3 / K1   | 43-11089 |
| 8               | A      | 30                | 2                  | 0,3                  | 0,25                     | SAL-12-RKW8-RS8-0,3 / K1 | 43-11106 |
|                 |        |                   |                    | 0,6                  |                          | SAL-12-RKW8-RS8-0,6 / K1 | 43-11107 |
|                 |        |                   |                    | 1,5                  |                          | SAL-12-RKW8-RS8-1,5 / K1 | 43-11108 |
|                 |        |                   |                    | 3                    |                          | SAL-12-RKW8-RS8-3 / K1   | 43-11109 |

TPU, UL, irradiated, orange, Li12Y11X

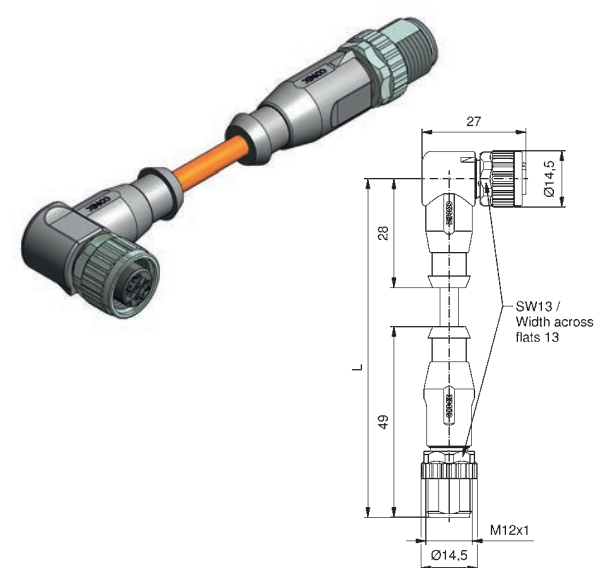

Pin 1  
Pin 3  
Pin 4

Pin 1  
Pin 2  
Pin 3  
Pin 4

Pin 1  
Pin 2  
Pin 3  
Pin 4  
Pin 5

|   |   |     |   |     |      |                          |          |
|---|---|-----|---|-----|------|--------------------------|----------|
| 3 | A | 250 | 4 | 0,3 | 0,34 | SAL-12-RKW3-RS3-0,3 / J1 | 43-10704 |
|   |   |     |   | 0,6 |      | SAL-12-RKW3-RS3-0,6 / J1 | 43-10705 |
|   |   |     |   | 1,5 |      | SAL-12-RKW3-RS3-1,5 / J1 | 43-10706 |
|   |   |     |   | 3   |      | SAL-12-RKW3-RS3-3 / J1   | 43-10707 |
| 4 | A | 250 | 4 | 0,3 | 0,34 | SAL-12-RKW4-RS4-0,3 / J1 | 43-10724 |
|   |   |     |   | 0,6 |      | SAL-12-RKW4-RS4-0,6 / J1 | 43-10725 |
|   |   |     |   | 1,5 |      | SAL-12-RKW4-RS4-1,5 / J1 | 43-10726 |
|   |   |     |   | 3   |      | SAL-12-RKW4-RS4-3 / J1   | 43-10727 |
| 5 | A | 60  | 4 | 0,3 | 0,34 | SAL-12-RKW5-RS5-0,3 / J1 | 43-10968 |
|   |   |     |   | 0,6 |      | SAL-12-RKW5-RS5-0,6 / J1 | 43-10969 |
|   |   |     |   | 1,5 |      | SAL-12-RKW5-RS5-1,5 / J1 | 43-10970 |
|   |   |     |   | 3   |      | SAL-12-RKW5-RS5-3 / J1   | 43-10971 |