

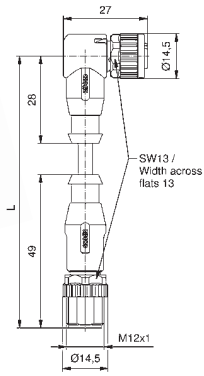

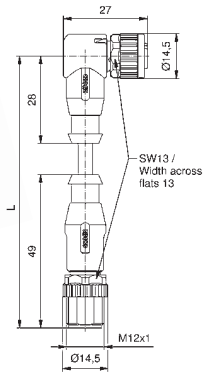

Female connector angled with 3-LED
Male connector axial

PVC, grey, LiYY

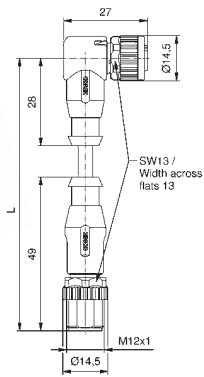

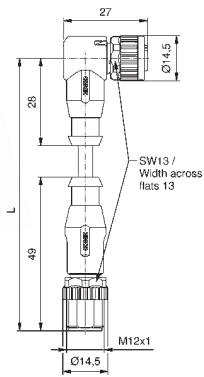

Contact assignment

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
4	A	30	4	0,3	0,34	SAL-12-RKW4-RS4-3L-0,3/A1	43-10416
				0,6		SAL-12-RKW4-RS4-3L-0,6/A1	43-10417
				1,5		SAL-12-RKW4-RS4-3L-1,5/A1	43-10418
				3		SAL-12-RKW4-RS4-3L-3/A1	43-10419
5	A	30	4	0,3	0,34	SAL-12-RKW5-RS5-3L-0,3/A1	43-10848
				0,6		SAL-12-RKW5-RS5-3L-0,6/A1	43-10849
				1,5		SAL-12-RKW5-RS5-3L-1,5/A1	43-10850
				3		SAL-12-RKW5-RS5-3L-3/A1	43-10851

TPU, UL, halogenfree, black, Li9Y11Y

			4	A	30	4	0,3	SAL-12-RKW4-RS4-3L-0,3/K1	43-10840
							0,6	SAL-12-RKW4-RS4-3L-0,6/K1	43-10841
							1,5	SAL-12-RKW4-RS4-3L-1,5/K1	43-10842
							3	SAL-12-RKW4-RS4-3L-3/K1	43-10843
			5	A	30	4	0,3	SAL-12-RKW5-RS5-3L-0,3/K1	43-10860
							0,6	SAL-12-RKW5-RS5-3L-0,6/K1	43-10861
							1,5	SAL-12-RKW5-RS5-3L-1,5/K1	43-10862
							3	SAL-12-RKW5-RS5-3L-3/K1	43-10863

TPU, UL, irradiated, orange, Li12Y11X

			4	A	30	4	0,3	SAL-12-RKW4-RS4-3L-0,3/J1	43-10844
							0,6	SAL-12-RKW4-RS4-3L-0,6/J1	43-10845
							1,5	SAL-12-RKW4-RS4-3L-1,5/J1	43-10846
							3	SAL-12-RKW4-RS4-3L-3/J1	43-10847
			5	A	30	4	0,3	SAL-12-RKW5-RS5-3L-0,3/J1	43-10864
							0,6	SAL-12-RKW5-RS5-3L-0,6/J1	43-10865
							1,5	SAL-12-RKW5-RS5-3L-1,5/J1	43-10866
							3	SAL-12-RKW5-RS5-3L-3/J1	43-10867