

Female connector axial, screwable,
wire cross section 0.5mm²


PVC, grey, LiYY

Contact assignment


Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm ²]	Description	Part No.
3		50 V AC / 60 V DC	5	0,5	2	SAL-8-RK3-2 / A1 / 05	42-12226
					3	SAL-8-RK3-3 / A1 / 05	42-12227
					5	SAL-8-RK3-5 / A1 / 05	42-12228
					10	SAL-8-RK3-10 / A1 / 05	42-12229
4		50 V AC / 60 V DC	5	0,5	2	SAL-8-RK4-2 / A1 / 05	42-12266
					3	SAL-8-RK4-3 / A1 / 05	42-12267
					5	SAL-8-RK4-5 / A1 / 05	42-12268
					10	SAL-8-RK4-10 / A1 / 05	42-12269

Pin 1 
Pin 3 
Pin 4 

Pin 1 
Pin 2 
Pin 3 
Pin 4 

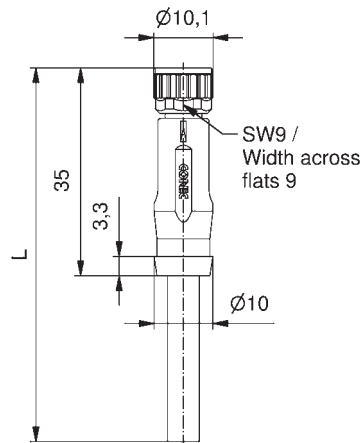

TPU, UL, halogenfree, black, Li9Y11Y

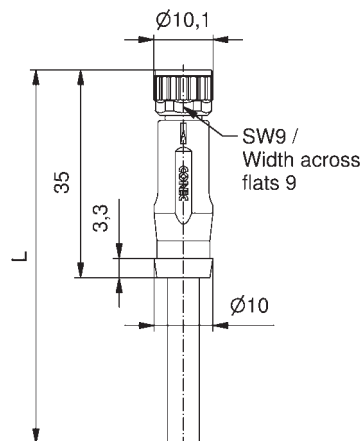

Pin 1 
Pin 3 
Pin 4 

Pin 1 
Pin 2 
Pin 3 
Pin 4 

3		50 V AC / 60 V DC	5	0,5	2	SAL-8-RK3-2 / K1 / 05	42-12230
					3	SAL-8-RK3-3 / K1 / 05	42-12231
					5	SAL-8-RK3-5 / K1 / 05	42-12232
					10	SAL-8-RK3-10 / K1 / 05	42-12233
4		50 V AC / 60 V DC	5	0,5	2	SAL-8-RK4-2 / K1 / 05	42-12270
					3	SAL-8-RK4-3 / K1 / 05	42-12271
					5	SAL-8-RK4-5 / K1 / 05	42-12272
					10	SAL-8-RK4-10 / K1 / 05	42-12273