


Female connector angled, screwable

PVC, grey, LiYY


Contact assignment

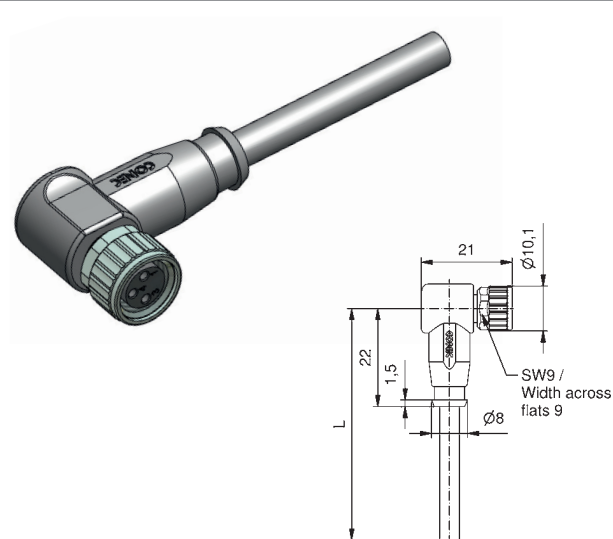

Pin 1
Pin 3
Pin 4

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKW3-2 / A1	42-10016
				3		SAL-8-RKW3-3 / A1	42-10017
				5		SAL-8-RKW3-5 / A1	42-10018
				10		SAL-8-RKW3-10 / A1	42-10019
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKW4-2 / A1	42-10048
				3		SAL-8-RKW4-3 / A1	42-10049
				5		SAL-8-RKW4-5 / A1	42-10050
				10		SAL-8-RKW4-10 / A1	42-10051
5	B	30	3	2	0,25	SAL-8B-RKW5.1-2 / A1	42-11751
				3		SAL-8B-RKW5.1-3 / A1	42-11752
				5		SAL-8B-RKW5.1-5 / A1	42-11753
				10		SAL-8B-RKW5.1-10 / A1	42-11754

TPU, UL, halogenfree, black, Li9Y11Y

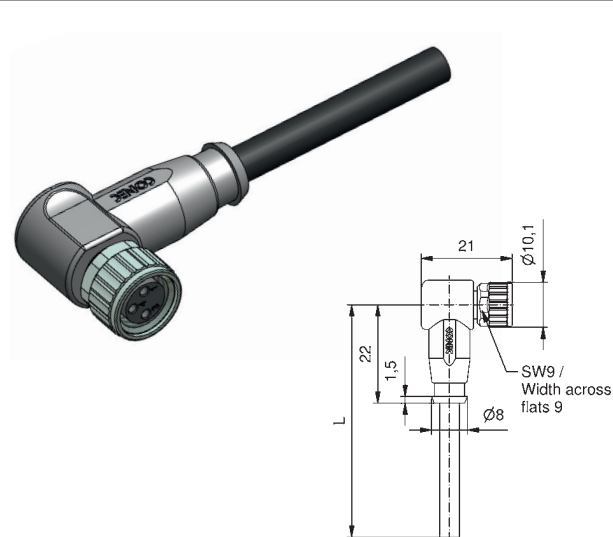

Pin 1
Pin 3
Pin 4

3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKW3-2 / K1	42-10020
				3		SAL-8-RKW3-3 / K1	42-10021
				5		SAL-8-RKW3-5 / K1	42-10022
				10		SAL-8-RKW3-10 / K1	42-10023
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKW4-2 / K1	42-10052
				3		SAL-8-RKW4-3 / K1	42-10053
				5		SAL-8-RKW4-5 / K1	42-10054
				10		SAL-8-RKW4-10 / K1	42-10055
5	B	30	3	2	0,25	SAL-8B-RKW5.1-2 / K1	42-11748
				3		SAL-8B-RKW5.1-3 / K1	42-11749
				5		SAL-8B-RKW5.1-5 / K1	42-11656
				10		SAL-8B-RKW5.1-10 / K1	42-11750