

Male connector axial, snap-in

PVC, grey, LiYY

Contact assignment


Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]
3		50 V AC / 60 V DC	3	2	0,25
				3	
				5	
				10	
4		50 V AC / 60 V DC	3	2	0,25
				3	
				5	
				10	
5	B	30	3	2	0,25
				3	
				5	
				10	
				10	

Description	Part No.
SAL-8-RSS3-2 / A1	42-10532
SAL-8-RSS3-3 / A1	42-10746
SAL-8-RSS3-5 / A1	42-10747
SAL-8-RSS3-10 / A1	42-10748
SAL-8-RSS4-2 / A1	42-10531
SAL-8-RSS4-3 / A1	42-10749
SAL-8-RSS4-5 / A1	42-10750
SAL-8-RSS4-10 / A1	42-10751
SAL-8B-RSS5.1-2 / A1	42-11124
SAL-8B-RSS5.1-3 / A1	42-11125
SAL-8B-RSS5.1-5 / A1	42-11126
SAL-8B-RSS5.1-10 / A1	42-11127

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

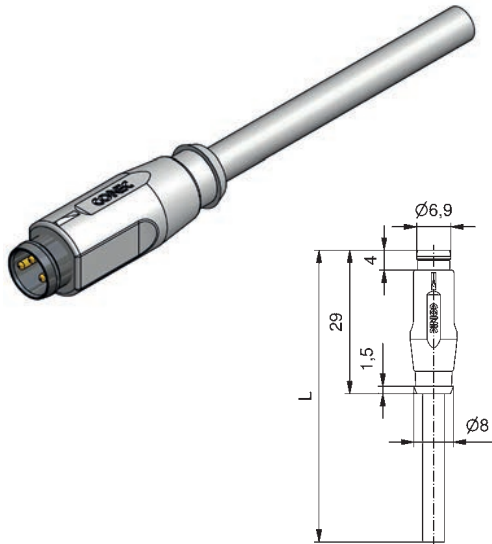

TPU, UL, halogenfree, black, Li9Y11Y

3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RSS3-2 / K1	42-10760
				3		SAL-8-RSS3-3 / K1	42-10761
				5		SAL-8-RSS3-5 / K1	42-10762
				10		SAL-8-RSS3-10 / K1	42-10763
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RSS4-2 / K1	42-10764
				3		SAL-8-RSS4-3 / K1	42-10765
				5		SAL-8-RSS4-5 / K1	42-10766
				10		SAL-8-RSS4-10 / K1	42-10767
5	B	30	3	2	0,25	SAL-8B-RSS5.1-2 / K1	42-11116
				3		SAL-8B-RSS5.1-3 / K1	42-11117
				5		SAL-8B-RSS5.1-5 / K1	42-11118
				10		SAL-8B-RSS5.1-10 / K1	42-11119
				10			

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

