


Male connector axial, snap-in,  
wire cross section 0.5mm<sup>2</sup>

PVC, grey, LiYY

Contact assignment

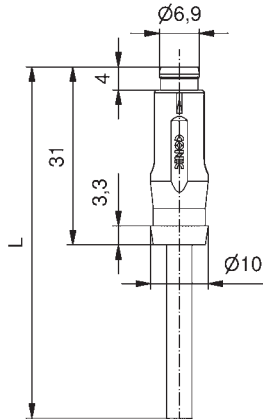


Pin 1 ■  
Pin 3 ■  
Pin 4 ■

Pin 1 ■  
Pin 2 ■  
Pin 3 ■  
Pin 4 ■

| Number of poles | Coding | Rated voltage [V] | Current rating [A] | Cable length = L [m] | Wire cross section [mm <sup>2</sup> ] | Description             | Part No. |
|-----------------|--------|-------------------|--------------------|----------------------|---------------------------------------|-------------------------|----------|
| 3               |        | 50 V AC / 60 V DC | 5                  | 2                    | 0,5                                   | SAL-8-RSS3-2 / A1 / 05  | 42-13059 |
|                 |        |                   |                    | 3                    |                                       | SAL-8-RSS3-3 / A1 / 05  | 42-13060 |
|                 |        |                   |                    | 5                    |                                       | SAL-8-RSS3-5 / A1 / 05  | 42-13061 |
|                 |        |                   |                    | 10                   |                                       | SAL-8-RSS3-10 / A1 / 05 | 42-13062 |
| 4               |        | 50 V AC / 60 V DC | 5                  | 2                    | 0,5                                   | SAL-8-RSS4-2 / A1 / 05  | 42-13067 |
|                 |        |                   |                    | 3                    |                                       | SAL-8-RSS4-3 / A1 / 05  | 42-13068 |
|                 |        |                   |                    | 5                    |                                       | SAL-8-RSS4-5 / A1 / 05  | 42-13069 |
|                 |        |                   |                    | 10                   |                                       | SAL-8-RSS4-10 / A1 / 05 | 42-13070 |

TPU, UL, halogenfree, black, Li9Y11Y

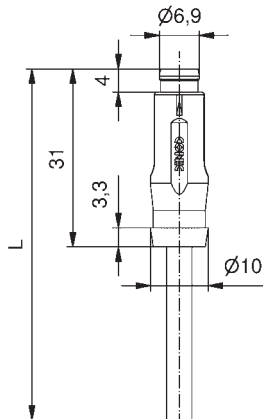

Pin 1 ■  
Pin 3 ■  
Pin 4 ■

Pin 1 ■  
Pin 2 ■  
Pin 3 ■  
Pin 4 ■

|   |  |                   |   |    |     |                         |          |
|---|--|-------------------|---|----|-----|-------------------------|----------|
| 3 |  | 50 V AC / 60 V DC | 5 | 2  | 0,5 | SAL-8-RSS3-2 / K1 / 05  | 42-13063 |
|   |  |                   |   | 3  |     | SAL-8-RSS3-3 / K1 / 05  | 42-13064 |
|   |  |                   |   | 5  |     | SAL-8-RSS3-5 / K1 / 05  | 42-13065 |
|   |  |                   |   | 10 |     | SAL-8-RSS3-10 / K1 / 05 | 42-13066 |
| 4 |  | 50 V AC / 60 V DC | 5 | 2  | 0,5 | SAL-8-RSS4-2 / K1 / 05  | 42-13071 |
|   |  |                   |   | 3  |     | SAL-8-RSS4-3 / K1 / 05  | 42-13072 |
|   |  |                   |   | 5  |     | SAL-8-RSS4-5 / K1 / 05  | 42-13073 |
|   |  |                   |   | 10 |     | SAL-8-RSS4-10 / K1 / 05 | 42-13074 |