

Male connector axial, screwable / snap-in

PVC, grey, LiYY


Contact assignment



Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3		50 V AC / 60 V DC	3	0,25	2	SAL-8-RSU3-2 / A1	42-10072
					3	SAL-8-RSU3-3 / A1	42-10073
					5	SAL-8-RSU3-5 / A1	42-10074
					10	SAL-8-RSU3-10 / A1	42-10075
4		50 V AC / 60 V DC	3	0,25	2	SAL-8-RSU4-2 / A1	42-10104
					3	SAL-8-RSU4-3 / A1	42-10105
					5	SAL-8-RSU4-5 / A1	42-10106
					10	SAL-8-RSU4-10 / A1	42-10107

Pin 1 
Pin 3 
Pin 4 


Pin 1 
Pin 2 
Pin 3 
Pin 4 

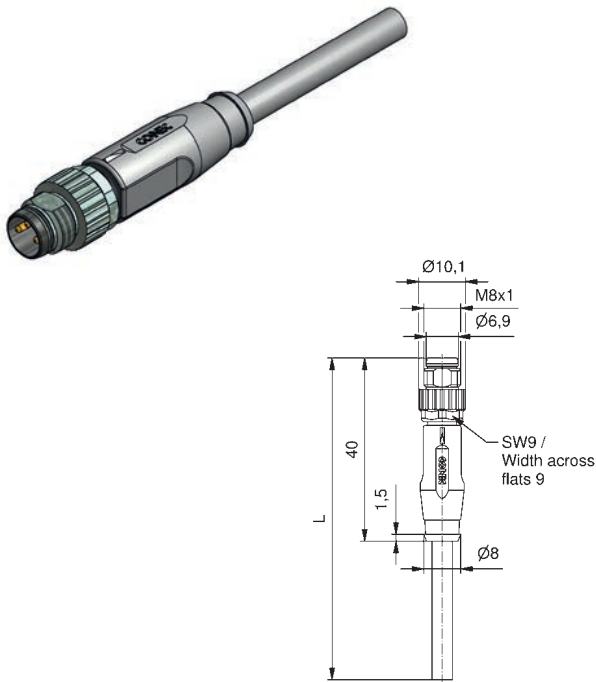

TPU, UL, halogenfree, black, Li9Y11Y

Pin 1 
Pin 3 
Pin 4 

Pin 1 
Pin 2 
Pin 3 
Pin 4 

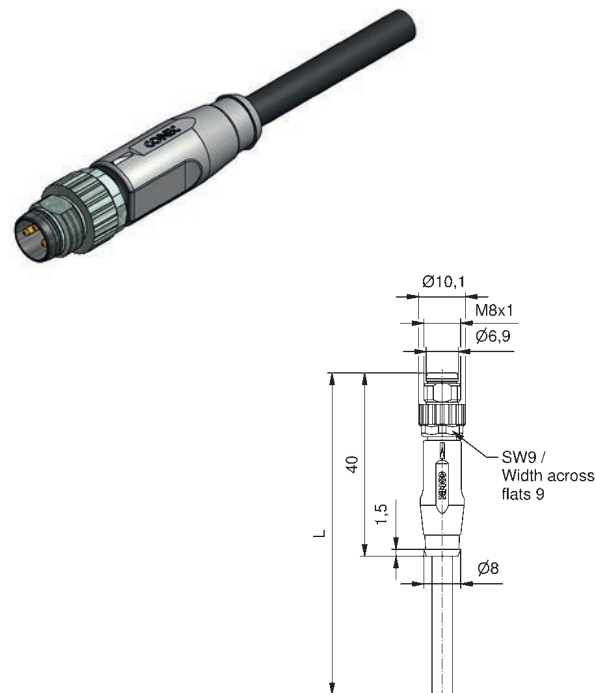

3	50 V AC / 60 V DC	3	0,25	2	SAL-8-RSU3-2 / K1	42-10076
				3	SAL-8-RSU3-3 / K1	42-10077
				5	SAL-8-RSU3-5 / K1	42-10078
				10	SAL-8-RSU3-10 / K1	42-10079
4	50 V AC / 60 V DC	3	0,25	2	SAL-8-RSU4-2 / K1	42-10108
				3	SAL-8-RSU4-3 / K1	42-10109
				5	SAL-8-RSU4-5 / K1	42-10110
				10	SAL-8-RSU4-10 / K1	42-10111