


Female connector axial, screwable
Male connector axial, screwable

PVC, grey, LiYY

Contact assignment

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm ²]	Description	Part No.
3		50 V AC / 60 V DC	5	0,3	0,5	SAL-8-RK3-RS3-0,3 / A1 / 05	42-12242
						SAL-8-RK3-RS3-0,6 / A1 / 05	42-12243
						SAL-8-RK3-RS3-1,5 / A1 / 05	42-12244
						SAL-8-RK3-RS3-3 / A1 / 05	42-12245
4		50 V AC / 60 V DC	5	0,3	0,5	SAL-8-RK4-RS4-0,3 / A1 / 05	42-12250
						SAL-8-RK4-RS4-0,6 / A1 / 05	42-12251
						SAL-8-RK4-RS4-1,5 / A1 / 05	42-12252
						SAL-8-RK4-RS4-3 / A1 / 05	42-12253

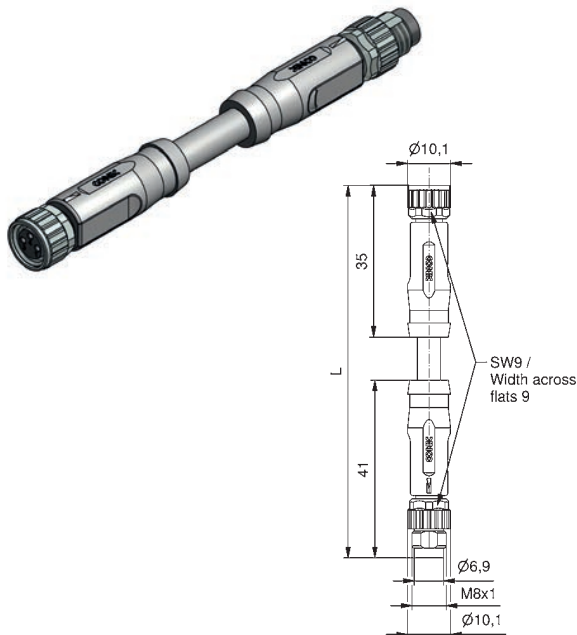

TPU, UL, halogenfree, black, Li9Y11Y

3		50 V AC / 60 V DC	5	0,3	0,5	SAL-8-RK3-RS3-0,3 / K1 / 05	42-12246
						SAL-8-RK3-RS3-0,6 / K1 / 05	42-12247
						SAL-8-RK3-RS3-1,5 / K1 / 05	42-12248
						SAL-8-RK3-RS3-3 / K1 / 05	42-12249
4		50 V AC / 60 V DC	5	0,3	0,5	SAL-8-RK4-RS4-0,3 / K1 / 05	42-12254
						SAL-8-RK4-RS4-0,6 / K1 / 05	42-12255
						SAL-8-RK4-RS4-1,5 / K1 / 05	42-12256
						SAL-8-RK4-RS4-3 / K1 / 05	42-12257

