


Female connector axial, snap-in
Male connector axial, snap-in

PVC, grey, LiYY

Contact assignment

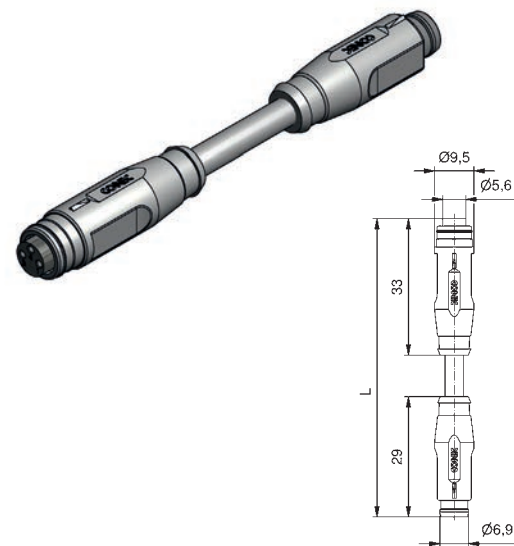


Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3		50 V AC / 60 V DC	3	0,3	0,25	SAL-8-RKS3-RSS3-0,3 / A1	42-10811
						SAL-8-RKS3-RSS3-0,6 / A1	42-10812
						SAL-8-RKS3-RSS3-1,5 / A1	42-10813
						SAL-8-RKS3-RSS3-3 / A1	42-10814
4		50 V AC / 60 V DC	3	0,3	0,25	SAL-8-RKS4-RSS4-0,3 / A1	42-10819
						SAL-8-RKS4-RSS4-0,6 / A1	42-10820
						SAL-8-RKS4-RSS4-1,5 / A1	42-10821
						SAL-8-RKS4-RSS4-3 / A1	42-10822
5	B	30	3	0,3	0,25	SAL-8B-RKS5.1-RSS5.1-0,3 / A1	42-11136
						SAL-8B-RKS5.1-RSS5.1-0,6 / A1	42-11137
						SAL-8B-RKS5.1-RSS5.1-1,5 / A1	42-11138
						SAL-8B-RKS5.1-RSS5.1-3 / A1	42-11139

TPU, UL, halogenfree, black, Li9Y11Y

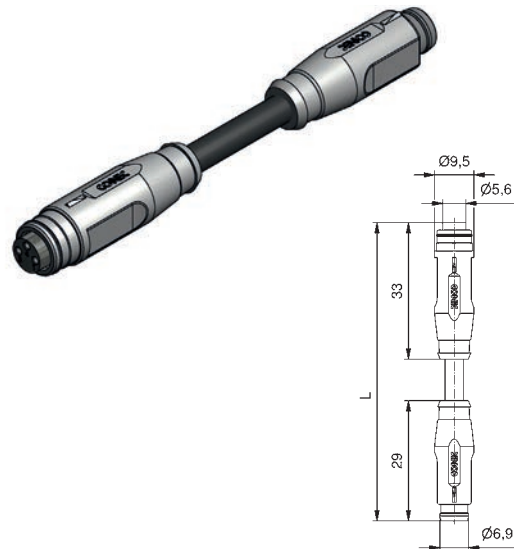

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

3		50 V AC / 60 V DC	3	0,3	0,25	SAL-8-RKS3-RSS3-0,3 / K1	42-10815
						SAL-8-RKS3-RSS3-0,6 / K1	42-10816
						SAL-8-RKS3-RSS3-1,5 / K1	42-10817
						SAL-8-RKS3-RSS3-3 / K1	42-10818
4		50 V AC / 60 V DC	3	0,3	0,25	SAL-8-RKS4-RSS4-0,3 / K1	42-10823
						SAL-8-RKS4-RSS4-0,6 / K1	42-10824
						SAL-8-RKS4-RSS4-1,5 / K1	42-10825
						SAL-8-RKS4-RSS4-3 / K1	42-10826
5	B	30	3	0,3	0,25	SAL-8B-RKS5.1-RSS5.1-0,3 / K1	42-11132
						SAL-8B-RKS5.1-RSS5.1-0,6 / K1	42-11133
						SAL-8B-RKS5.1-RSS5.1-1,5 / K1	42-11134
						SAL-8B-RKS5.1-RSS5.1-3 / K1	42-11135