


Female connector axial, snap-in
Male connector axial, screwable/snap-in

PVC, grey, LiYY

Contact assignment

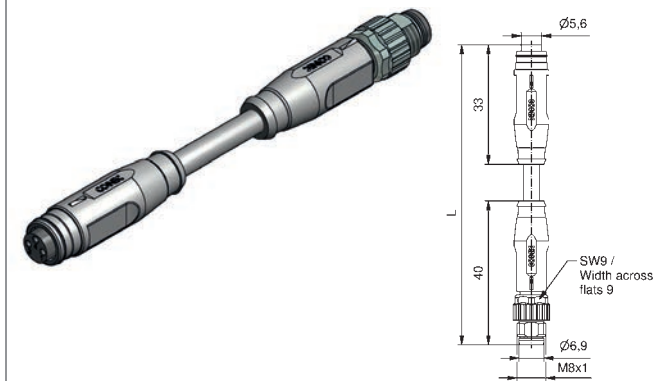


Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3		50 V AC / 60 V DC	3	0,3	0,25	SAL-8-RKS3-RSU3-0,3 / A1	42-10173
				0,6		SAL-8-RKS3-RSU3-0,6 / A1	42-10174
				1,5		SAL-8-RKS3-RSU3-1,5 / A1	42-10175
				3		SAL-8-RKS3-RSU3-3 / A1	42-10176
4		50 V AC / 60 V DC	3	0,3	0,25	SAL-8-RKS4-RSU4-0,3 / A1	42-10189
				0,6		SAL-8-RKS4-RSU4-0,6 / A1	42-10190
				1,5		SAL-8-RKS4-RSU4-1,5 / A1	42-10191
				3		SAL-8-RKS4-RSU4-3 / A1	42-10192

TPU, UL, halogenfree, black, Li9Y11Y

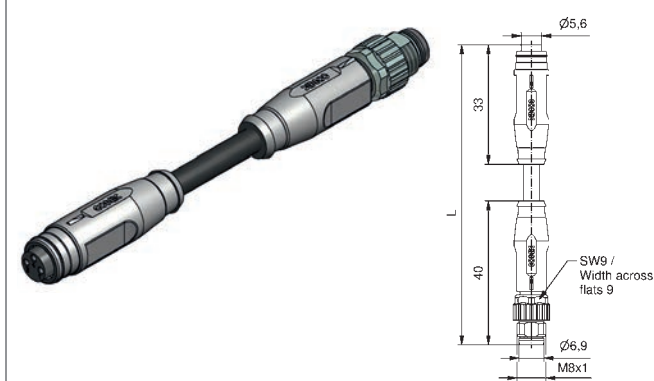

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4