

SPRING CLAMP TERMINAL BLOCKS, PLUGGABLE, 5.00mm PITCH



* Approval pending




Product family	Pole size	Color	Option
SP995xxVBNC			
Centerline	Design	Function	

- spring clamp terminal block, pluggable
- centerline 5.00 mm, direction of connection vertical 0°
- fittable without loss of poles
- color black
- two connections per pole

Technical data

UL V / A / AWG	250 / 10.5 / 24 - 14		
SEV 10.5 A / 250 V / 4 kV / 3 / 0.2 - 2.5 mm ² / IEC 61984			
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250.0 V	630.0 V	630.0 V
Rated test voltage	4.0 kV	4.0 kV	4 kV
Insulating material class	CTI 600		
Rated wiring solid wire	0.2 - 2.5 mm ²		
Rated wiring stranded wire	0.2 - 2.5 mm ²		
Rated wiring solid wire	AWG 24 - 14		
Rated wiring stranded wire	AWG 24 - 12		
Clearance and creepage distances	3.2 mm		
Protection category according to IEC 60529	IP 20		
Min. insul. strip length	9 mm		
Color	black		

Dimensional drawing

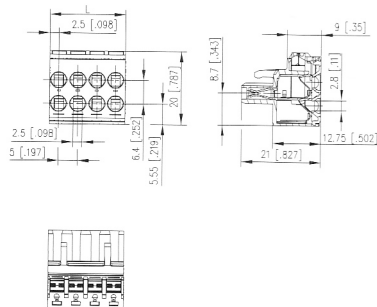

L = (Pole size - 1) * centerline + 5 mm (0.197 in.)

P/N

SP995XXVBNC ☐ VBNC

Complete the part number
by adding the pole size.

02	03	04	06	08		